




China abec 7 Bearing Supplier

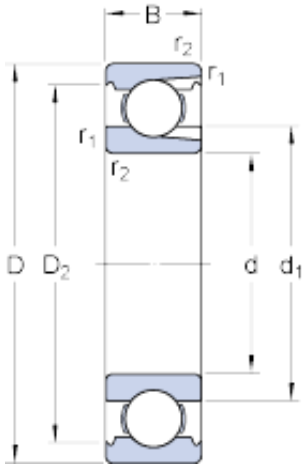

307 Bearing 2D drawings and 3D CAD models

SKF NU 307 RN 307 Cylindrical Roller Bearing NU307ECP RN307ECM Bearings

Bearing No. 307

Size	80x35x21 mm
Bore Diameter	80 mm
Outer Diameter	35 mm
Width	21 mm
d	35 mm
D	80 mm
B	21 mm
d ₁	49.56 mm
D ₂	69.2 mm
r _{1,2} - min.	1.5 mm
d _a - min.	44 mm
D _a - max.	71 mm
r _a - max.	1.5 mm
Basic dynamic load rating - C	34.7 kN
Basic static load rating - C ₀	26.5 kN
Fatigue load limit - P _u	1.1 kN
Reference speed	16000 r/min
Limiting speed	9500 r/min
Calculation factor - k _r	0.05
Category	Single Row Ball Bearings
Inventory	1.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.5



China abec 7 Bearing Supplier

EAN	7316576680243
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	Yes
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	35MM Bore; 80MM Outside Diameter; 21MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; Yes Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	307
Weight / LBS	1.1
Bore	1.378 Inch 35 Millimeter
Outside Diameter	3.15 Inch 80 Millimeter
Outer Race Width	0.827 Inch 21 Millimeter
bore diameter:	35 mm
static load capacity:	26.5 kN
outside diameter:	80 mm
precision rating:	ABEC 3 (ISO Class 6)



China abec 7 Bearing Supplier

overall width:	21 mm
finish/coating:	Uncoated
bore type:	Round
cage material:	Steel
closure type:	Open
outer ring width:	21 mm
row type & fill slot:	Single Row Filling Slot
fillet radius:	1.5 mm
snap ring included:	Without Snap Ring
maximum rpm:	9500 RPM
internal clearance:	C0
series:	30
dynamic load capacity:	34.7 kN
thrust application warning:	This product can not be used in Thrust Applications
d_1	49.56 mm
D_2	69.2 mm
$r_{1,2}$ min.	1.5 mm
d_a min.	44 mm
D_a max.	71 mm
r_a max.	1.5 mm
Basic dynamic load rating C	34.7 kN
Basic static load rating C_0	26.5 kN
Fatigue load limit P_u	1.12 kN
Calculation factor k_r	0.05
Mass bearing	0.48 kg