




# China abec 7 Bearing Supplier

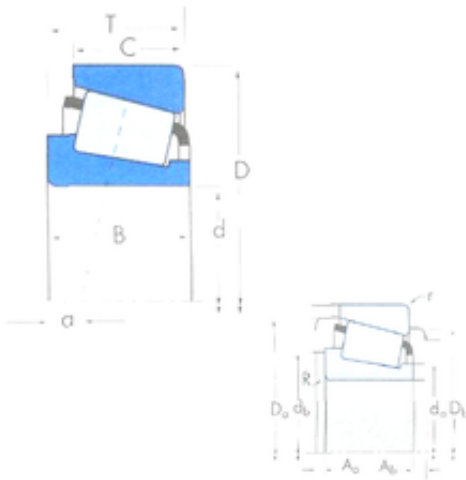

TIMKEN Taper roller bearing  
 HH234048/HH234010 bearing HH 234048  
 HH234010 HH234048/10 TIMKEN

Bearing No. HH234048/HH234010

|                               |                       |
|-------------------------------|-----------------------|
| Size                          | 152.4x307.975x88.9 mm |
| Bore Diameter                 | 152,4 mm              |
| Outer Diameter                | 307,975 mm            |
| Width                         | 88,9 mm               |
| d                             | 152,4 mm              |
| D                             | 307,975 mm            |
| T                             | 88,9 mm               |
| B                             | 93,662 mm             |
| C                             | 66,675 mm             |
| R                             | 9,7 mm                |
| r                             | 6,9 mm                |
| a -                           | 26,4 mm               |
| Da                            | 285,5 mm              |
| db                            | 191 mm                |
| da                            | 179 mm                |
| Db                            | 276 mm                |
| Aa                            | 12,5 mm               |
| Ab -                          | 0,9                   |
| Weight                        | 29,14 Kg              |
| Basic static load rating (C0) | 1580 kN               |
| Factor (G1)                   | 718,4                 |
| Factor (G2)                   | 62,1                  |
| Factor (Cg)                   | 0,0319                |
| Factor (K)                    | 1,79                  |
| Basic dynamic load rating     | 293                   |

HH234048/HH234010 Bearing 2D drawings and 3D CAD models



## China abec 7 Bearing Supplier

|                                     |         |
|-------------------------------------|---------|
| (C90)                               |         |
| Basic dynamic load rating<br>(Ca90) | 164     |
| Basic dynamic load rating<br>(C1)   | 1130 kN |
| Calculation factor (e)              | 0,33    |